

Subject:

Water collects under the vegetable drawer due to air infiltration and/or frozen drain.

Cause:

During fan motor operation, pressure inside the fresh food section will be lower than outside. Warm, humid air can enter the fresh food section if there is any opening, such as the hole for the water line at top of refrigerator.


Solution:

Use the Seal Kit to prevent air infiltration.
Install the Drain Clip to improve heat transfer to drain.

Parts Required:

DA81-05707A A/S-SEAL;AW,SEAL KIT

DA61-06796A CLIP-DRAIN EVAP REF

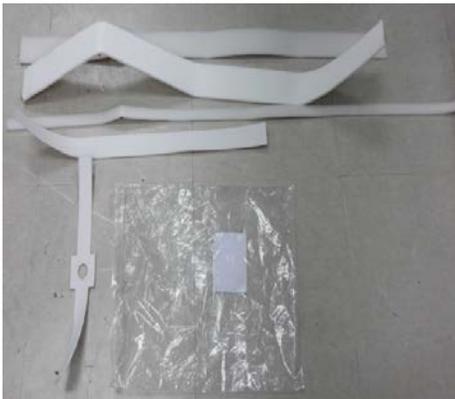


SERVICE TIP

PRODUCT: FD Refrig

DATE: 8/27/2012

- Models:**
- RF197AB RF197AC
 - RF217AB RF217AC
 - RF263AE RF265AA
 - RF265AC RF265AD
 - RF266AB RF266AD
 - RF266AE RF266AZ
 - RF267AA RF267AB
 - RF267AC RF267AD
 - RF267AE RF267AZ
 - RF268AB RF268AC
 - RF26VAD RF26XAE
 - RF26XAZ RFG237AA
 - RFG238AA RFG293HA
 - RFG295AB RFG296HD
 - RFG297AA RFG297AB
 - RFG297HD RFG298AA
 - RFG298HD RFG299AA
 - RFG299AB RFG29PHD
 - RFG29THD

Directions:

Top Table	1	<ol style="list-style-type: none"> 1) Disassemble the Cap. 2) Disassemble the Top Table. 	 
	2	Disassemble the water supply connector.	 
	3	Re-assemble after tucking up water supply hose with foam seal (W30mm*L50mm*T3mm). No gap allowed.	 

	4	<p>Tuck up whole area of hose with foam seal (W50mm*L80mm*T5mm). Make sure it is tight.</p>	
--	---	---	--

Water Tank	1	<p>Tuck up inlet and outlet of the water hose with OJC seal (W40mm*L80mm*T5mm), and then re-assemble.</p> <p>The sealed hose should be inserted into the hole located inside of the liner.</p>	
------------	---	--	--

Drain hole	1	<p>Install drain clip</p> 	 <p>Attach clip on heater</p> <p>Put tain into drain hole</p> <p>Adjust clip to be attached on heater firmly using LONG NOSE PLIER</p>
------------	---	---	--

Cover Evap	1	<p>Remove the evaporator cover. Check for condensation:</p> <p>A. On the fan motor case</p> <p>B. On the back of the evaporator cover aluminum plate</p> <p>C. Behind the drain plate.</p>	
	2	<p>Remove the aluminum tape on the drain pan.</p>	
	3	<p>Remove 4 screws in the case of the fan motor, and then remove the motor and shroud assembly.</p> <p>Be careful not to damage the tape.</p> <p>Attach the foam strip with the center hole onto the Styrofoam as shown. Reassemble evaporator cover.</p>	
	4	<p>Attach foam seal (W15mm) to bottom of evaporator cover.</p>	

This information is published for informational purposes only and intended for use only by personnel qualified for the specific tasks depicted. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when handling or servicing a product. Only qualified personnel should repair products powered by electricity. Any attempt to handle, service or repair the product or products by anyone other than qualified personnel could result in serious injury or death. You agree that your use of and reliance on this information is at your sole risk. This information is subject to change or update without notice. There are no warranties, either expressed or implied, regarding the accuracy or completeness of this information.”